Blackmagicdesign

ATEM 1 M/E Advanced Panel 20

The ATEM 1 M/E Advanced Panel 20 is a single M/E, 20 input button switching panel that includes the features and flexibility needed for switching big and small productions in a highly portable and compact design. It has 2 independent system control LCDs plus it can control up to 4 M/Es in larger switchers. All input buttons include LCDs for custom labeling and there is an independent select bus. Dual power inputs provide redundancy and the built-in 4 port Ethernet switch means no additional network equipment is needed so it will fit even the most challenging live production spaces!
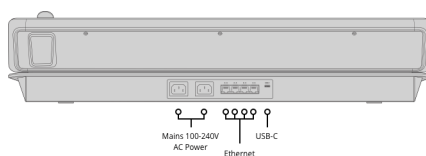
€3 549

Connections

Ethernet
4 x 10/100/1000 BASE-T with loop output for additional control panels or computers.

Software Updates
1 x USB-C for firmware updates.

Product Specifics

Number of Mix Effects Rows 1	**Preview Transition** 1	**Dedicated Macro Buttons** 1 x 20
Direct Cross Points 20	**Transition Rate Displays** Via main menu	**Transport Control Buttons** 8
Shifted Cross Points 40	**LCD Menu Displays** 2	**Destination Bus** 1
Crosspoint Button Type Tri-Color LED	**Menu Control** 2 x 20 buttons	**Source Select Bus** 1

Fader Bar	3 Axis Joystick	Numeric Keypad
1	1	1

Software

Software Applications
ATEM Software Control Panel.

Operating Systems

Mac 11.1 Big Sur,
Mac 12.0 Monterey or later.

Windows 10 and 11.

Power Requirements

Input Voltage	Redundant Power	Power Usage
2 x Internal 100 - 240V AC.	Yes	75W

Physical Specifications

317 mm

721 mm

16 mm

143 mm

KG
8.7 kg

Environmental Specifications

Operating Temperature	Storage Temperature	Relative Humidity
0° to 40° C (32° to 104° F)	-20° to 60° C (-4° to 140° F)	0% to 95% non-condensing

What's Included

ATEM 1 M/E Advanced Panel 20
Welcome wallet with QR code for software download

Warranty

12 Month Limited Manufacturer's Warranty.

Blackmagic Design Authorized Reseller